


**DATASHEET**


1/4" Turn Lever Type Operation  
 Process Conn.: 3/4" NPT(F)  
 Instrument Conn.: 3/4" NPT(F)  
 Bore.: Ø15.0 mm

Material.: AS PER BOM

M.W.P.: 6000 psig @ 100 °F  
 Seat Test Press (Hydro): 6600 psig  
 Seat Test Press (Pneu): 90 psig  
 Body Test Press (Hydro): 9000 psig

Sr No	PART	DRAWING NO.	QTY
1	END CONNECTOR	ASTM A182 Gr. F316	1
2	BODY	ASTM A182 Gr. F316	1
3	SECONDARY SEAL	FLEXIBLE GTAPHITE	1
4	PRIMARY SEAL	PTFE	1
5	CONNECTOR O-RING	VITON AED Type	1
6	BALL	ASTM A479 Gr. 316	1
7	BALL SEAT	PEEK	2
8	THRUST SEAL	CARBON FILLED PTFE	1
9	SPINDLE O-RING	VITON AED Type	1
10	GLAND SEAL	CARBON FILLED PTFE	1
11	GLAND WASHER	ASTM A479 Gr. 316	1
12	LOCK PIN	SS 304	1
13	SPINDLE	ASTM A479 Gr. 316	1
14	HANDLE NUT	SS 304	1
15	ALLEN BOLT	SS 304	1
16	HANDLE	SS 304	1
17	HANDLE SLEEVE	PVC	1

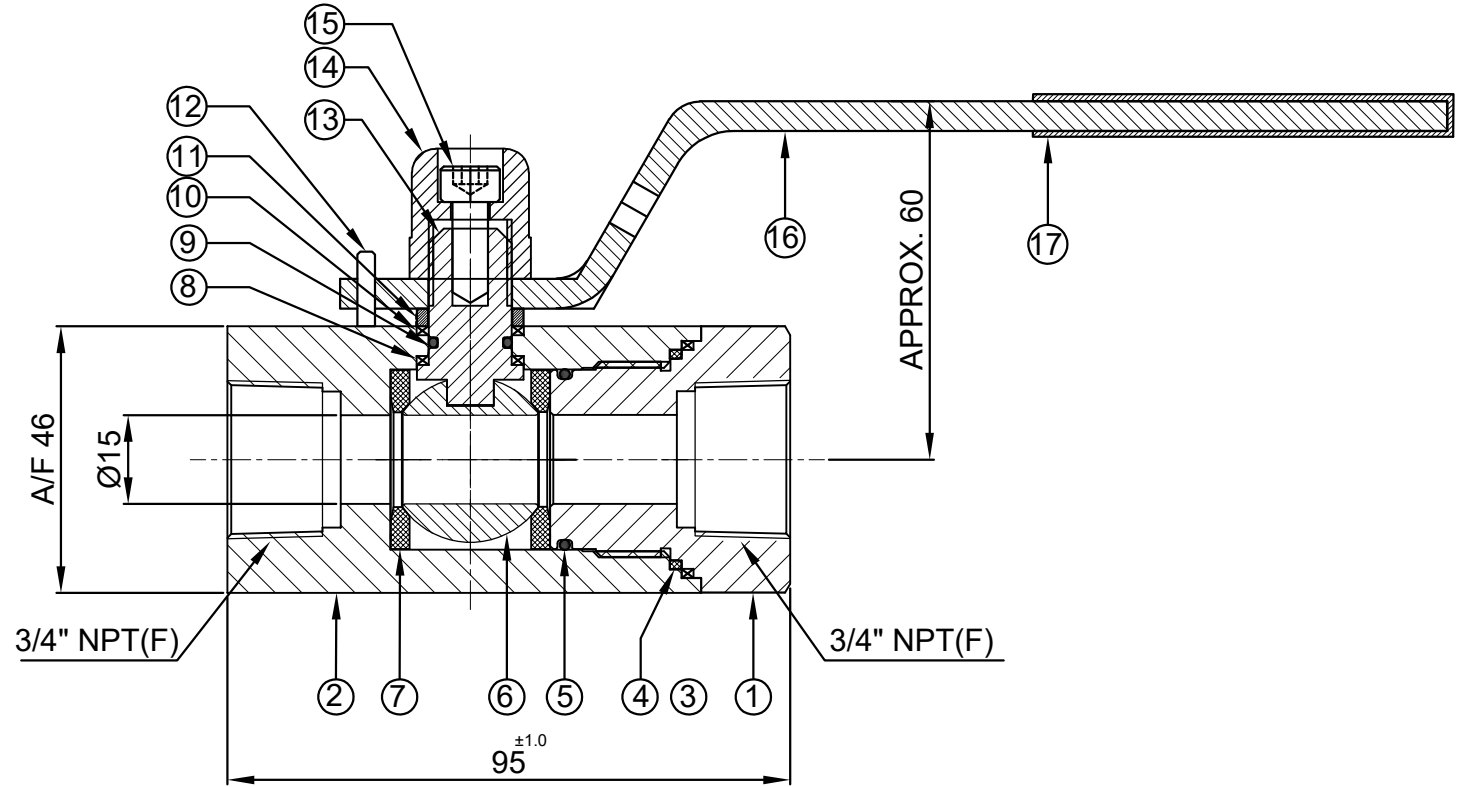

 <p><b>havi</b> Fittings &amp; Valves info@havi.in www.havi.in A-201, PRIME TRADE CENTER SATIVALI ROAD, VASAI (E), PALGHAR - 401208, MAHARASHTRA, INDIA</p>	PART NAME : Ball Valve 6K Series, 15mm Bore, Size.: 3/4" NPT(F) x NPT(F)				CUSTOMER NAME: -				
	DWG NO : - BV6K-15MB-12F-12F-S6				PROJECT NAME & NO: -				
	MATERIAL : - AS PER BOM				ENQ NO: EN2223/00286				
					SO NO: -				
SIGN		DATE		SIGN		DATE		SHEET NO: 01 OF 01	
DRAWN BY: VK		01.07.2022		* All dimensions are in mm. Dimensions for reference only and are subject to change without notice				REV NO: 00	
CHECKED BY: SB		01.07.2022		* This document is the property of Havi Engineering India Pvt. Ltd. No exploitation or release of any text contained herein or relating to this document is permitted in any form without the written consent of HAVI.				SCALE: NTS	
APPROVED BY: SM		01.07.2022							

PATH: X:\2022-2023\EXPORT\EN222300286