


SR NO	DESCRIPTION	MATERIAL	QTY
1	BODY	ASTM A182 Gr.F316	1
2	TIP	ASTM A479 Gr.SS316	1
3	BONNET WASHER	ASTM A479 Gr.SS316	1
4	GLAND PACKING	GRAPHITE	1 SET
5	BACKUP WASHER	ASTM A479 Gr.SS316	1
6	BONNET PUSHER	ASTM A479 Gr.SS316	1
7	HANDLE	SS 304	1
8	GRUB SCREW	SS 304	2
9	SPINDLE	ASTM A479 Gr.SS316	1
10	CHECK NUT	SS304	1
11	BONNET	ASTM A479 Gr.SS316	1
12	DOWEL PIN	SS 304	1
13	DUST CAP	ALUMINIUM	1

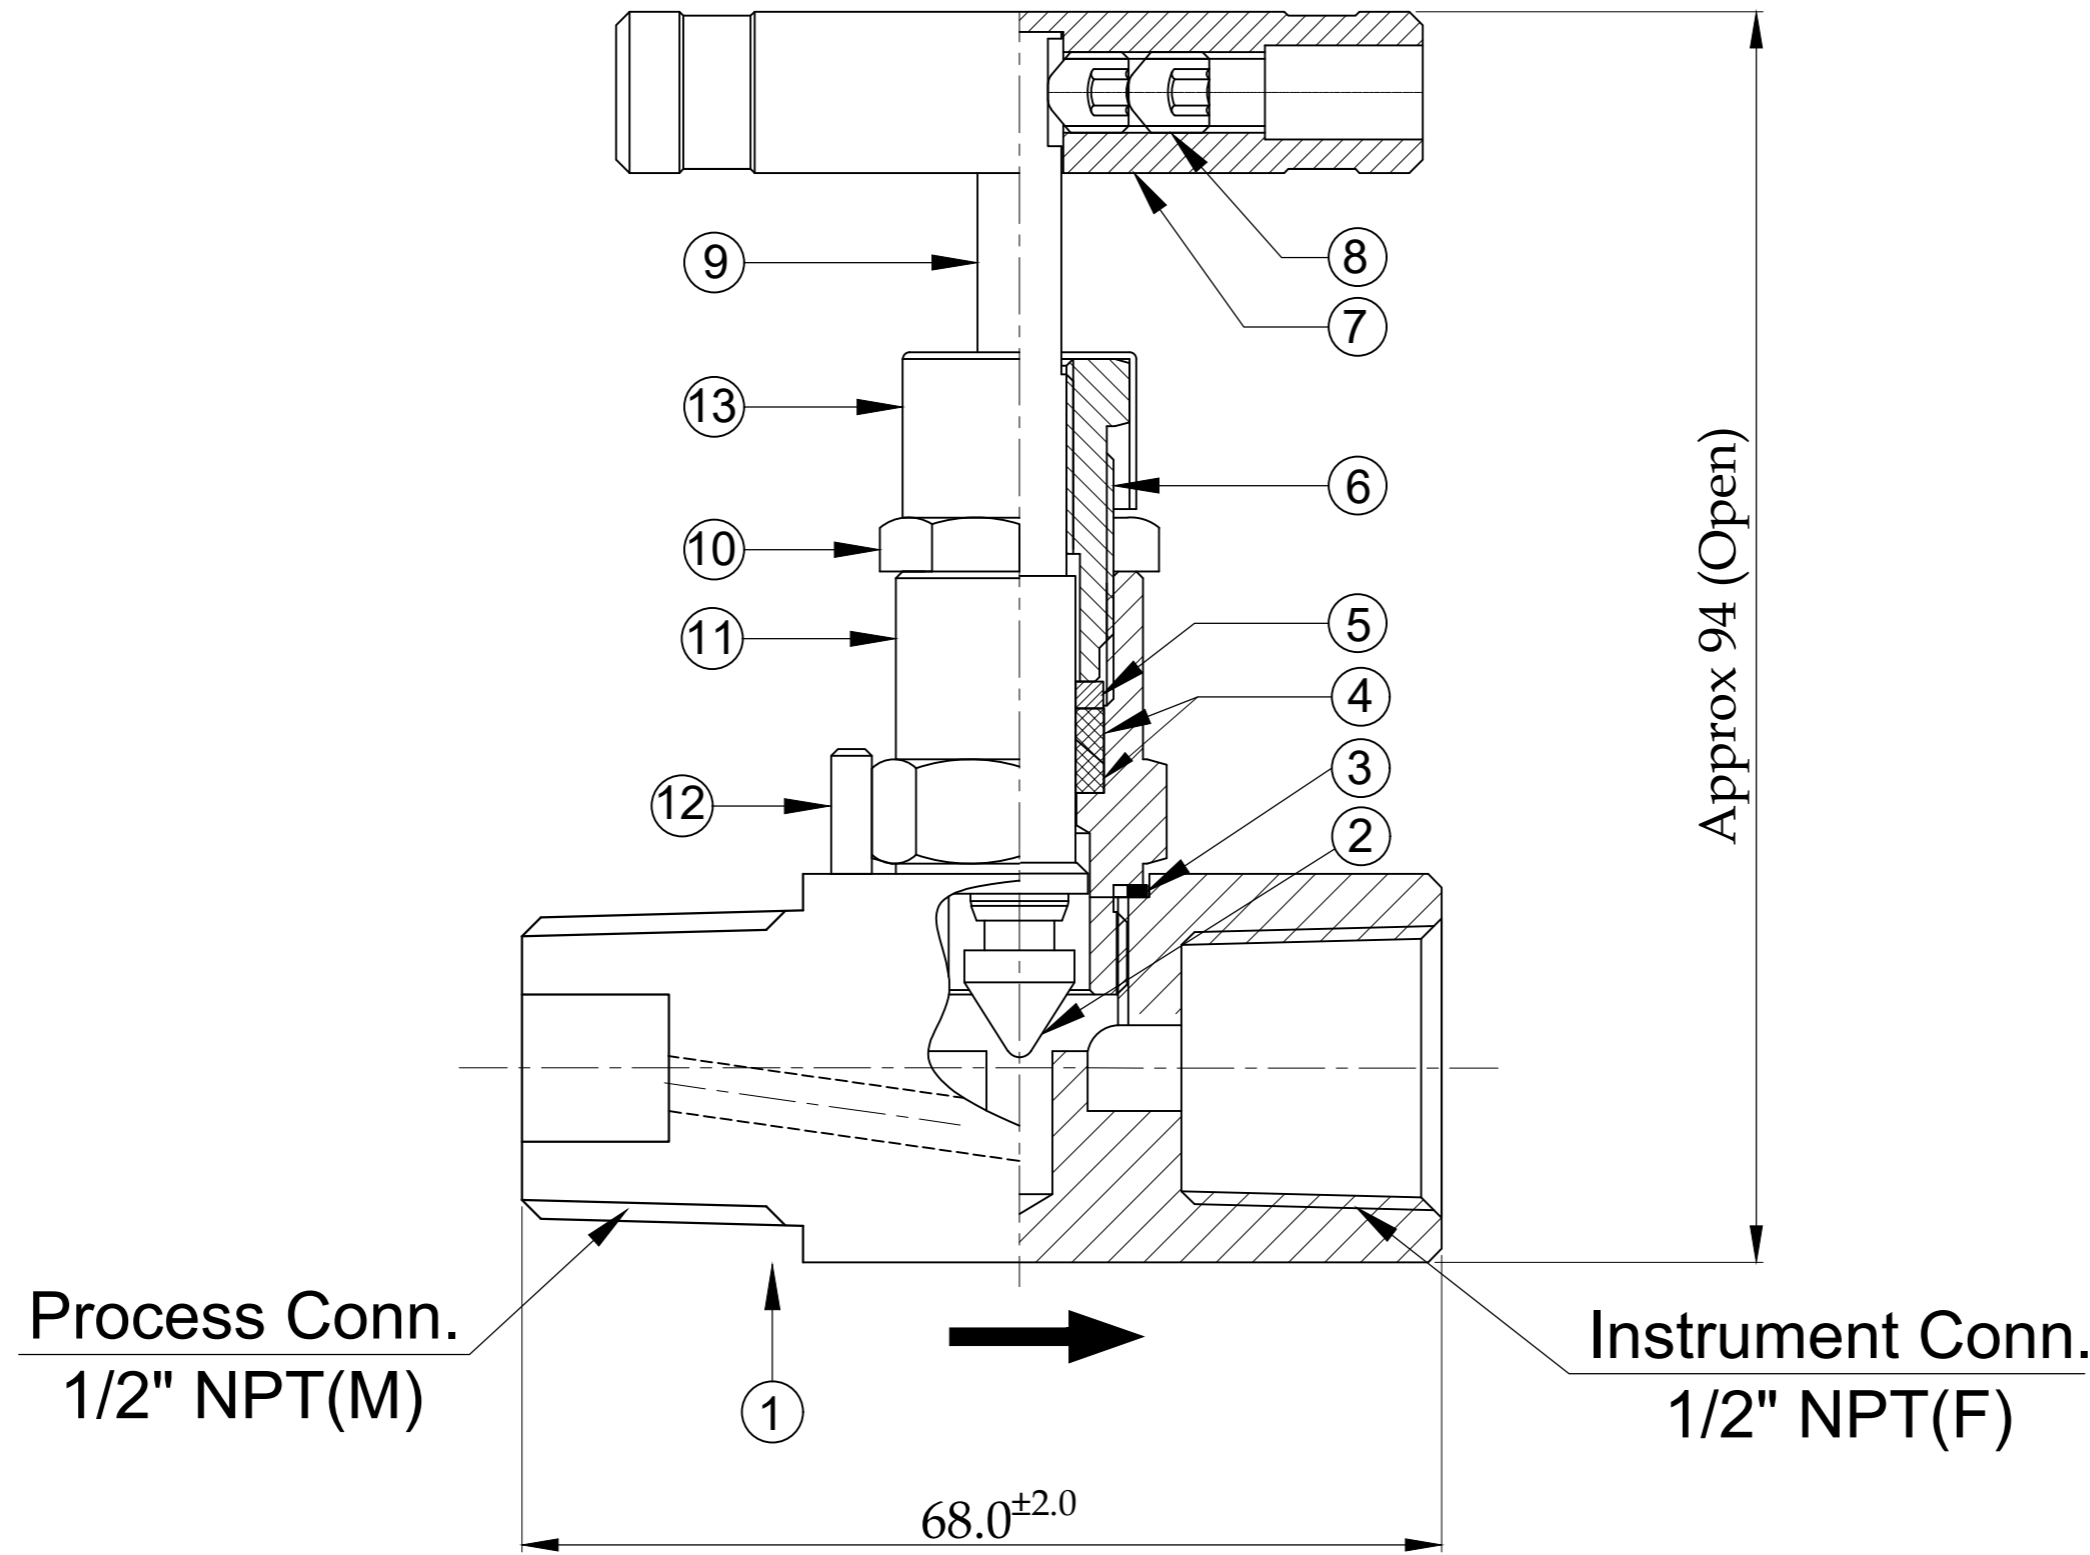

Data Sheet.

Process Conn.: 1/2" ODT
Instrument Conn.: 1/2" ODT

Orifice: 4mm

Screwed Bonnet Design



MWP.: 6000 psig @ 100 °F
Seat Test Press (Hydro): 6600 psig
Seat Test Press (Pneu): 90 psig
Body Test Press (Hydro): 9000 psig
Temperature Range:- -54°C to 649°C

havi
Fittings & Valves
info@havi.in www.havi.in
A-201, PRIME TRADE CENTER
SATIVALI ROAD, VASAI (E),
PALGHAR - 401208, MAHARASHTRA, INDIA

DRAWN BY	MBC	12.09.2023
CHECKED BY	VSM	12.09.2023
APPROVED BY	SRD	12.09.2023

PART NAME : BAR STOCK NEEDLE VALVE 1/2" NPT-M x 1/2" NPT-F				CUSTOMER NAME:-			
DWG NO : NVBS-8M-8F-S6-G				PROJECT NAME :-			
MATERIAL : - AS PER BOM				END USER NAME :-			
R1				ENQ NO :-			
R1 CUSTOMER COMMENTS INCORPORATED				SO No:- SO2324/00186			
REV NO	DESCRIPTION	SIGN	DATE	SHEET NO: 01 OF 01			
* All dimensions are in mm. Dimensions for reference only and are subject to change without notice				REV NO: 01			
* This document is the property of Havi Engineering India Pvt. Ltd. No exploitation or release of any text contained herein or relating to this document is permitted in any form without the written consent of HAVI.				SCALE: NTS			

PATH: Y:\FY 2023-24\ISO-0186\GAD\SUBMITTED GAD