

Distribution Manifolds

For Process Instrumentation



ENGINEERING YOUR SUCCESS.

Contents

Air Header Distribution Manifold - LPAHM Series	Page 4
Hi-Pro Distribution Manifold - HPAHM Series	Page 6
Hi-Pro Modular Distribution Manifold - HPDM Series	Page 8
Compact Distribution Manifold - HCDM Series	Page 10
Complementary Products	Page 11

⚠ WARNING


FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.


This document and other information from Parker Hannifin Corporation, its subsidiaries or its authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.


The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

 www.linkedin.com/company/Parker-Process-Control-Technology

 www.facebook.com/ParkerHannifinProcessControl

 www.youtube.com/ParkerHannifinCorp

Air Header Distribution Manifold

LPAHM Series - up to 275 psi

Parker's air header distribution manifolds are designed to distribute air from the compressor to the actuators on pneumatic instruments, such as steam flow meters, pressure controllers and valve positioners. These manifolds are widely used in industrial chemical processing, plastic processing and energy industries and are approved for low pressure applications up to and beyond 275 psi.

Manufactured from AISI 316 stainless steel the air header distribution manifold offers complete customer system compatibility that reduces installation time and potential leak paths. The coded welded construction with non destructive tested design minimises the number of potential leak paths, rather than fabricating with instrumentation connections with tubing, therefore reducing labour costs.

The air header distribution manifolds are designed for use with air only and are supplied with a number of lockable ball valves on opposite sides, right side or left side only to prevent unauthorized access.

Product Features

- Lockable handles as standard
- Lightweight ball valve design
- 316L Stainless Steel body
- 2" nominal bore header
- Welded body construction
- Flanged and threaded inlet options
- Four support feet welded for wall mounting

Product Benefits

- Lockable handles prevent accidental manual actuation of outlet valve
- Reduction in assembly time
- 316L nominal bore body as standard removes the possibility of internal scaling
- Greater volume capacity supporting fluctuations in air compressor supply
- Guaranteed full penetration welds - Coded welding and non destructive testing (NDT) as standard

How to Order

The correct part number is easily derived from the following number sequence


Flanged Inlet Style

LPAHM	S	6	8	F	150	8	N
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Flange Class	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection
LPAHM Low Pressure Air Header Distribution Manifold	S Stainless Steel	Insert Number From 4-20*	8 1/2	F Raised Face	150 150	8 1/2	N Female NPT
						16 1	

Threaded Connection Ends

LPAHM	S	4	8	R	8	N
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection
LPAHM Low Pressure Air Header Distribution Manifold	S Stainless Steel	Insert Number From 4-20*	8 1/2	N Female NPT	8 1/2 16 1	N Female NPT
				K BSPT		
				R BSPP		

* Max. 10 valves on each side. Even numbers only when specifying Both Sides configuration.

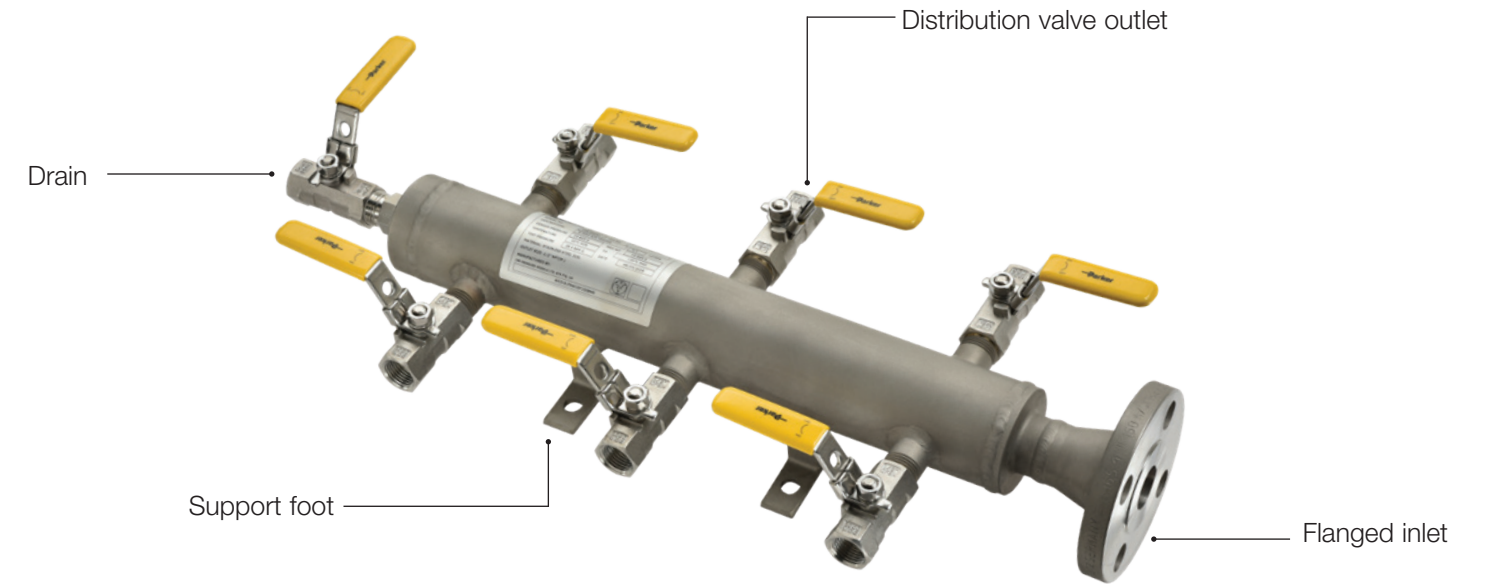

Air Header Distribution Manifold with 6 distribution valve outlets and flanged inlet. Both sides configuration.

Specifications

Central Pipe Body Material	Stainless Steel AISI 316
Ball Material	Stainless Steel 316
Stem Material	Stainless Steel 316
Seat Material	PTFE
Working Pressure	275 psi (19 bar)
Temperature Rating	-29 °C to 193 °C

Markets

- Petrochemical
- Chemical
- Plastic processing
- Industrial chemical processing
- Power generation
- Oil and gas offshore and onshore

Application

- Air distribution for pneumatic actuation

8	N	BVO		Valve Configuration
Distribution Valve Outlet Size (inch)	Distribution Valve Outlet Connection	Drain Options		
8 1/2	N Female NPT	BVO	Ball Valve Outlet	- Both Sides
		BPBVO	Ball Valve Plugged Outlet	R Right Side
		BP	Plugged Drain	L Left Side
		CP	Plugged Distribution Outlets	

8	N	BVO		Valve Configuration
Distribution Valve Outlet Size (inch)	Distribution Valve Outlet Connection	Drain Options		
8 1/2	N Female NPT	BVO	Ball Valve Outlet	- Both Sides
		BPBVO	Ball Valve Plugged Outlet	R Right Side
		BP	Plugged Drain	L Left Side
		CP	Plugged Distribution Outlets	

Hi-Pro Distribution Manifold

HPAHM Series

Parker's Hi-Pro distribution manifolds are designed for applications that use liquid or gas, low temperature steam and hydraulic actuation. The pressure rating of these manifolds is dictated by the inlet/outlet Flange Class or the thread connection.

These Hi-Pro distribution manifolds feature an ergonomic vinyl sleeve on the valve handle to provide positive grip and ensure ease of operation. Each nut has an innovative domed design, which prevents ingress of moisture and contamination of the thread, therefore preventing corrosion.

They feature a part-welded construction, with all welds carried out by coded welders, providing assurance of their robustness and performance. These manifolds are NDT (Non Destructive Testing) applied, giving the customer greater assurance.

Product Features

- Available with four support feet drilled for mounting for ease of installation.
- Nominal bore body manufactured from a wide thick gauge 316 Stainless Steel
- Domed nuts
- Ergonomic vinyl sleeve
- Coded welding and non-destructive testing (NDT) as standard - guaranteed full penetration welds
- Greater volume capacity

Product Benefits

- Ease of installation
- Corrosion resistant, eliminated internal scaling
- Domed nuts lock handles into place and prevent dirt and corrosion affecting the threads
- Easy to grip and comfortable
- Reliable, durable and safe
- Supports fluctuations in air compressor supply

How to Order

The correct part number is easily derived from the following number sequence


Flanged Inlet Style

HPAHM	S	6	8	F	150	8	N
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Flange Class	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection
HPAHM High Pressure Distribution Manifold	S Stainless Steel	Insert Number From 4-20*	8 1/2	F Raised Face	150 150	8 1/2	N Female NPT
			12 3/4			T Ring Type	
			16 1	R BSPP		16 1	
			24 11/2		24 11/2		
			32 2		32 2		

Threaded Inlet Style

HPAHM	S	4	8	R	8	N	
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection	
HPAHM High Pressure Distribution Manifold	S Stainless Steel	Insert Number From 4-20*	8 1/2	N Female NPT	8 1/2	N Female NPT	
			12 3/4				K BSPT
			16 1	R BSPP		16 1	R BSPP
			24 11/2	24 11/2			
			32 2	32 2			

* Max. 10 valves on each side. Even numbers only when specifying Both Sides configuration.

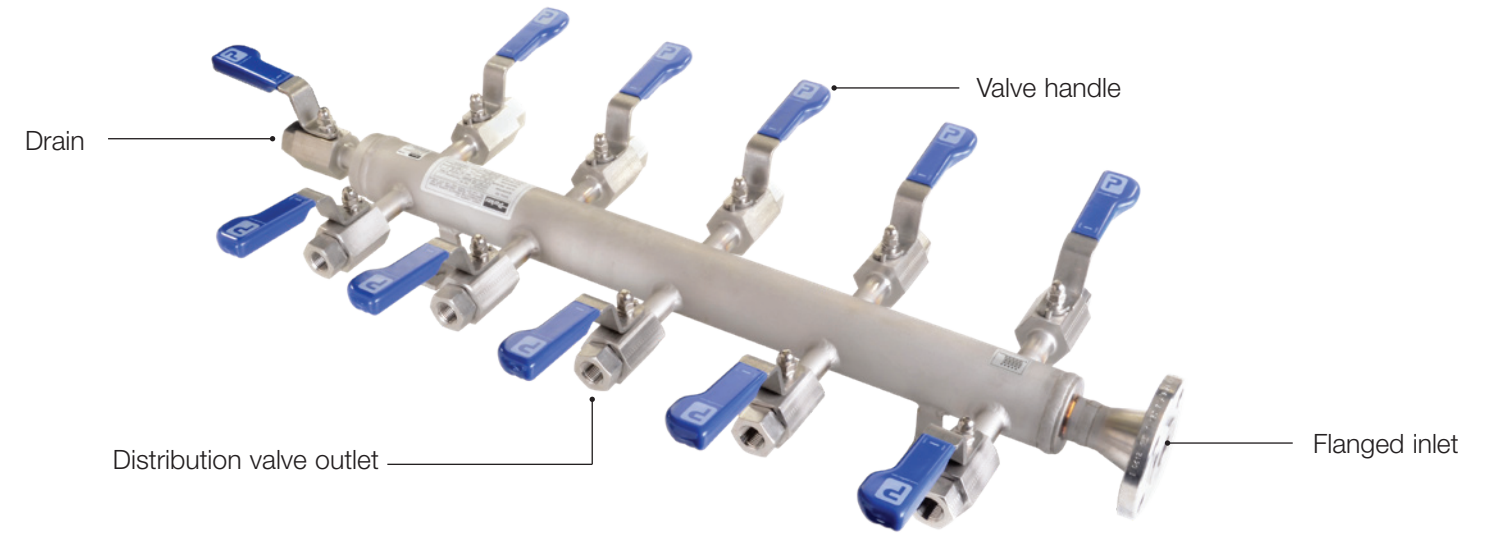

Hi-Pro distribution manifold with 10 distribution valve outlets.

Specifications

Central Pipe Body Material	Stainless Steel AISI 316
Ball Material	Stainless Steel 316
Stem Material	Stainless Steel 316
Seat Material	PTFE
Temperature Rating	-54 °C to 193 °C

Markets

- Oil and gas
- Petrochemical
- Chemical

Applications

- Liquid, gas and steam distribution

M10	A	BVO	Valve Configuration
Distribution Valve Outlet Size	Distribution Valve Outlet Connection	Drain Options	
4 1/4"	N Female NPT K BSPT R BSPP	BVO Ball Valve Outlet BPBVO Ball Valve Plugged Outlet BP Plugged Drain (Outlet) CP Plugged Distribution Outlets	- Both Sides
6 3/8"			R Right Side
8 1/2"			L Left Side
4 1/4"	A A-LOK		
6 3/8"			
8 1/2"			
M6 6mm			
M10 10mm M12 12mm			

8	N	BVO	Valve Configuration
Distribution Valve Outlet Size	Distribution Valve Outlet Connection	Drain Options	
4 1/4"	N Female NPT K BSPT R BSPP	BVO Ball Valve Outlet BPBVO Ball Valve Plugged Outlet BP Plugged Drain (Outlet) CP Plugged Distribution Outlets	- Both Sides
6 3/8"			R Right Side
8 1/2"			L Left Side
4 1/4"	A A-LOK		
6 3/8"			
8 1/2"			
M6 6mm			
M10 10mm M12 12mm			

Hi-Pro Modular Distribution Manifold

HPDM Series - up to 6,000 psi

Parker's Hi-Pro modular distribution manifolds are the ideal choice when flexibility is required within a distribution manifold. They are approved to operate at pressures up to 6,000 PSI and are used extensively in the oil, gas, chemical and petrochemical industries to provide safety and performance.

These innovative Hi-Pro modular distribution manifolds can be easily arranged in a layout to suit a wide range of different applications to distribute liquid or gas. They use standard components, therefore making it more affordable for the customer.


The Hi-Pro modular distribution manifolds feature an ergonomic vinyl sleeve on the valve handle to provide positive grip and ensure ease of operation. Each nut is domed in shape, which prevents ingress of moisture and contamination of the thread, which could cause corrosion. This manifold is available in up to 20 valves (even numbers only - spare valves can be blanked off). Temperature range up to 232°C with PEEK seats.

Features

- Manufactured from AISI 316 stainless steel
- Ergonomic vinyl sleeve
- Domed nuts
- Standard wall mounting (also permits mounting to a 2" NB pipe stand)
- Offers flexibility of inlet, with the option to connect a single valve to the inlet to act as a primary isolate valve.

Product Benefits

- Corrosion resistant
- Easy and comfortable to grip
- Domed nuts lock handles into place and prevent dirt or corrosion affecting the threads
- Ease of assembly
- Flexibility in design

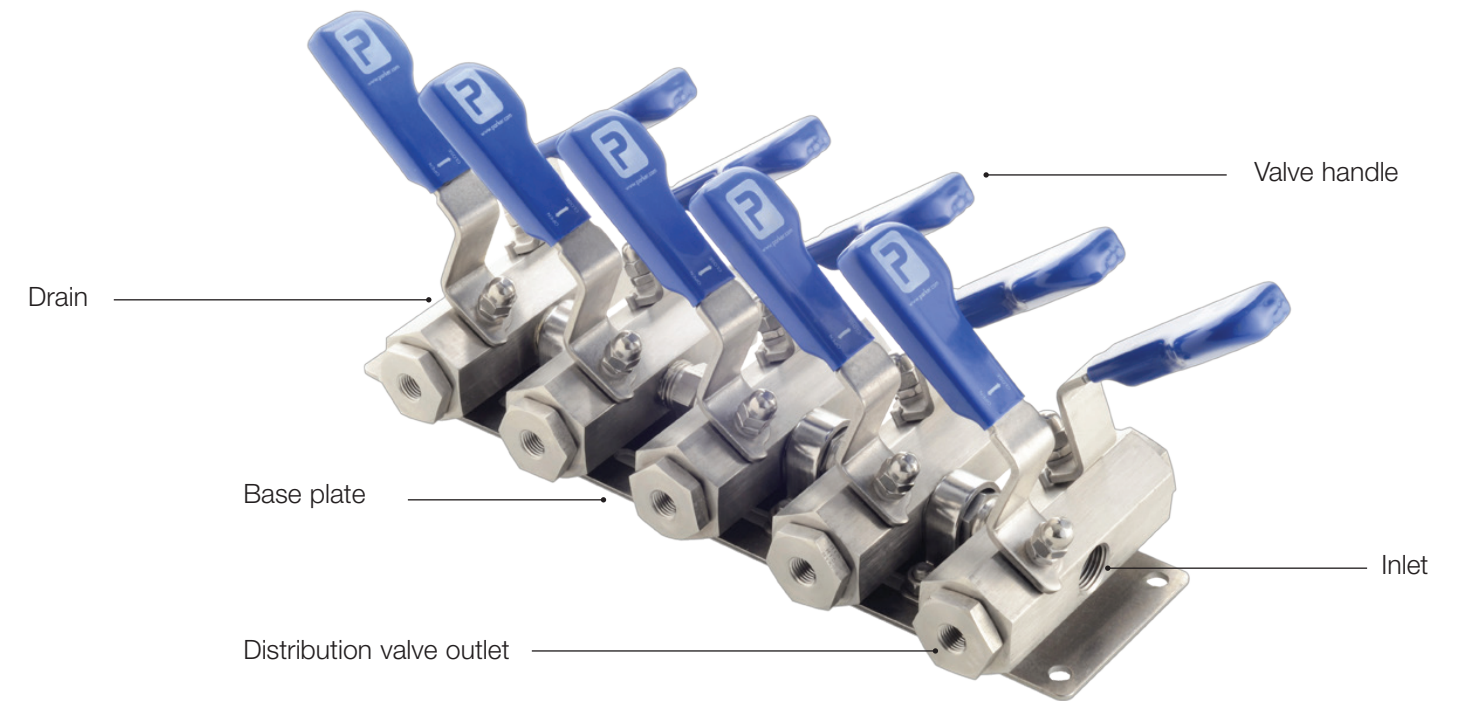

Hi-Pro modular distribution manifold with 10 distribution valve outlets.

Specifications


Central Pipe Body Material	Stainless Steel AISI 316
Ball Material	Stainless Steel 316
Stem Material	Stainless Steel 316
Seat Material	PTFE/PEEK
Maximum Working Pressure	6,000 psi (414 bar)
Temperature Rating	-51 °C to 232 °C

Markets

- Oil and gas
- Petrochemical
- Chemical

Applications

- Liquid and gas distribution

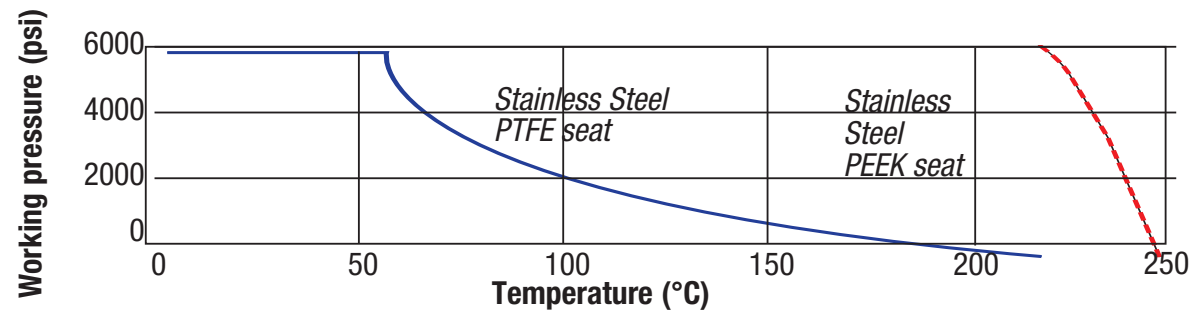

How to Order

The correct part number is easily derived from the following number sequence

HPDM	B	6	8	R	8	K
Series	Material	Number of Distribution Valve Outlets	Inlet Size (inch)	Inlet Connection	Drain Valve Outlet Size (inch)	Drain Valve Outlet Connection
HPDM Hi-Pro Modular Distribution Manifold	B Stainless Steel	Insert Number From 4-20	8 1/2	N Female NPT	8 1/2	N Female NPT
			12 3/4	K BSPT	12 3/4	K BSPT
			16 1	R BSPP	16 1	R BSPP

8	N	BP
Distribution Valve Outlet Size (inch)	Distribution Valve Outlet Connection	Drain Options
4 1/4	N Female NPT	BP Plugged Drain (Outlet)
6 3/8	K BSPT	CP Plugged Distribution Outlets
8 1/2	R BSPP	BCP All Outlets Plugged


Compact Distribution Manifold

HCDM Series - up to 6,000 psi

Parker's HCDM Series compact distribution manifolds offer a very compact design, making them suitable for space saving applications. They operate at pressures up to 6,000 PSI and feature all valves on the front face, for ease of accessibility.

These compact distribution manifolds utilise needle valves to enhance their compact design. They feature an anti-tamper key, which avoids unauthorised operator access.

The HCDM Series compact distribution manifolds are suitable for use with air and steam applications in the oil and gas, petrochemical and chemical industries. Ideal for panel mounting, these compact distribution manifolds feature all the valves on the front face, for ease of accessibility.

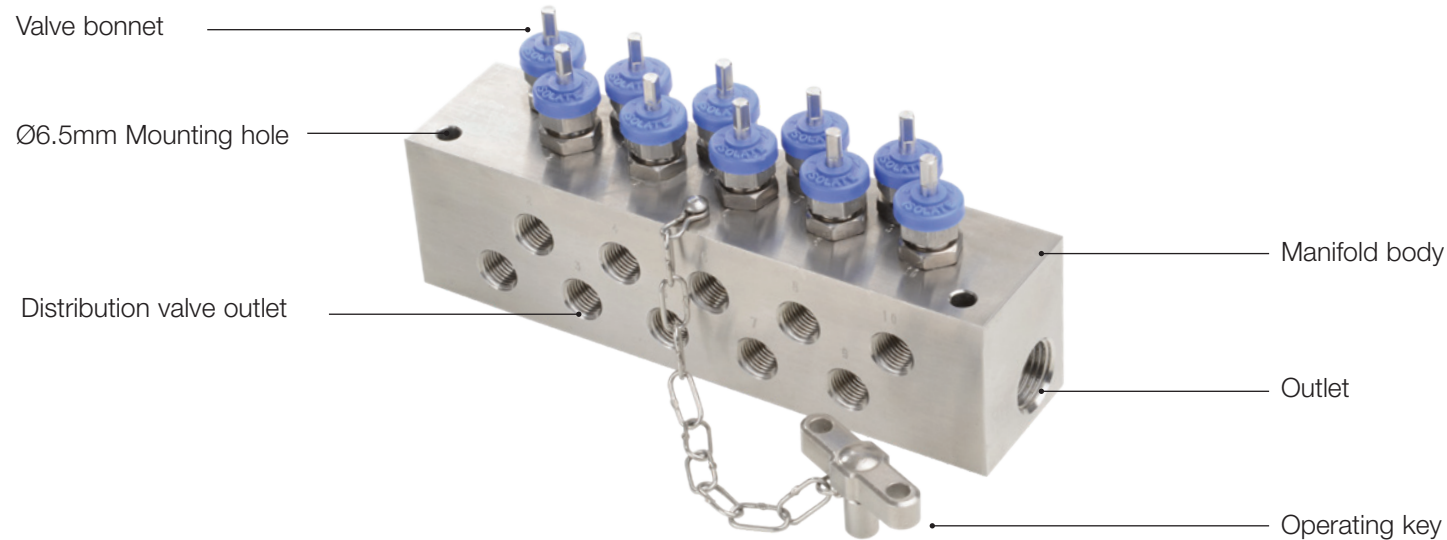

Product Features

- Valve style: globe style needle valve metal/ metal seat with retained operating key
- Material: AISI 316 stainless steel
- Main inlet: 1/2" female pipe thread (NPT)
- Main outlets: 1/2" female pipe thread (NPT)
- Distribution outlets: 1/4" female pipe thread (NPT) as standard.

How to Order

The correct part number is easily derived from the following number sequence

HCDM	S	5	3	PK	K	AT	NC
Series	Material	Number of Distribution Valve Outlets	Packing Material	Tips	Connection	Anti Tamper	Compliance
HCDM Compact Distribution Manifold	S Stainless Steel	5 5 10 10	3 Graphoil	9 Kel-F PK PEEK ST Stellite RT Regulating	K BSPT R BSPP	AT Anti-tamper bonnets and loose operating key	NC NACE

Complementary Products



Fittings & Materials (Catalogue 4190-FMTG)

- A complete guide to Parker IPDE's fittings, tubing and materials. Including tubing charts, anti corrosion information together with a comprehensive guide to the complete range of fittings



Process to Instrumentation Valves

- TAMAP 2 star ball or needle valve class A or class B
- Single block and bleed or double block and bleed
- Available in the following materials 316, Duplex or alloy 625
- A-LOK, CPI or BSPP connections
- Flange classes: 600 (covers 150, 300 and 600) class 2500 (covers 900, 1500 and 2500)
- To contact the division:

please telephone 00 44 1271 313131, or email ipde_technical@parker.com



H Series Instrument Needle Valves (Catalogue 4190-HV)

- Compact needle valves
- For applications up to 10,000 psi (690 bar)
- Available with integral A-LOK® or CPI™ connections, reducing leak paths and reducing installation costs
- Soft tipped optional seating available for gaseous applications
- Fire safe option



HBV Series Instrument Ball Valves (Catalogue 4190-HBV)

- Suitable for the most demanding applications in the oil, gas and process control industries
- Integral compression ends available, eliminating taper threads and thread sealants
- Two piece barstock design reduces body leakage paths
- Complies with ANSI/ASME B16.34 requirements where applicable
- NACE MR-01-75/ISO 15156 compliant materials available
- Fire safe option



Parker Grade Tube (Catalogue 4190-FMTG)

- Parker's Instrument tube fittings have been engineered and manufactured to consistently provide high levels of reliability, no systems integrity is complete without considering the critical link, tubing

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates,

Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt

Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt

Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku

Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles

Tel: +32 (0)67 280 900
parker.belgium@parker.com

BG – Bulgaria, Sofia

Tel: +359 2 980 1344
parker.bulgaria@parker.com

BY – Belarus, Minsk

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

CH – Switzerland, Etoy

Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany

Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst

Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup

Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid

Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa

Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve

Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens

Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budaörs

Tel: +36 23 885 470
parker.hungary@parker.com

IE – Ireland, Dublin

Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IL – Israel

Tel: +39 02 45 19 21
parker.israel@parker.com

IT – Italy, Corsico (MI)

Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty

Tel: +7 7273 561 000
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal

Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker

Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal

Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest

Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow

Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga

Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica

Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto

Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul

Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev

Tel: +48 (0)22 573 24 00
parker.poland@parker.com

UK – United Kingdom, Warwick

Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park

Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario

Tel: +1 905 693 3000

US – USA, Cleveland

Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill

Tel: +61 (0)2-9634 7777

CN – China, Shanghai

Tel: +86 21 2899 5000

HK – Hong Kong

Tel: +852 2428 8008

IN – India, Mumbai

Tel: +91 22 6513 7081-85

JP – Japan, Tokyo

Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul

Tel: +82 2 559 0400

MY – Malaysia, Shah Alam

Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington

Tel: +64 9 574 1744

SG – Singapore

Tel: +65 6887 6300

TH – Thailand, Bangkok

Tel: +662 186 7000

TW – Taiwan, Taipei

Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires

Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos

Tel: +55 800 727 5374

CL – Chile, Santiago

Tel: +56 2 623 1216

MX – Mexico, Toluca

Tel: +52 72 2275 4200

