


SR NO	PART DESCRIPTION	MATERIAL	QTY
1	BODY	ASTM Gr.A105	1
2	TIP	ASTM A479 Gr.SS316	1
3	BONNET WASHER	ASTM A479 Gr.SS316	1
4	GLAND PACKING	GRAPHITE	1
5	BACKUP WASHER	ASTM A479 Gr.SS316	1
6	BONNET PUSHER	ASTM Gr.A105	1
7	HANDLE	SS304	1
8	GRUB SCREW	SS304	2
9	SPINDLE	ASTM A479 Gr.SS316	1
10	CHECK NUT	SS304	1
11	BONNET	ASTM Gr.A105	1
12	DOWEL PIN	SS304	1
13	DUST CAP	ALUMINIUM	1

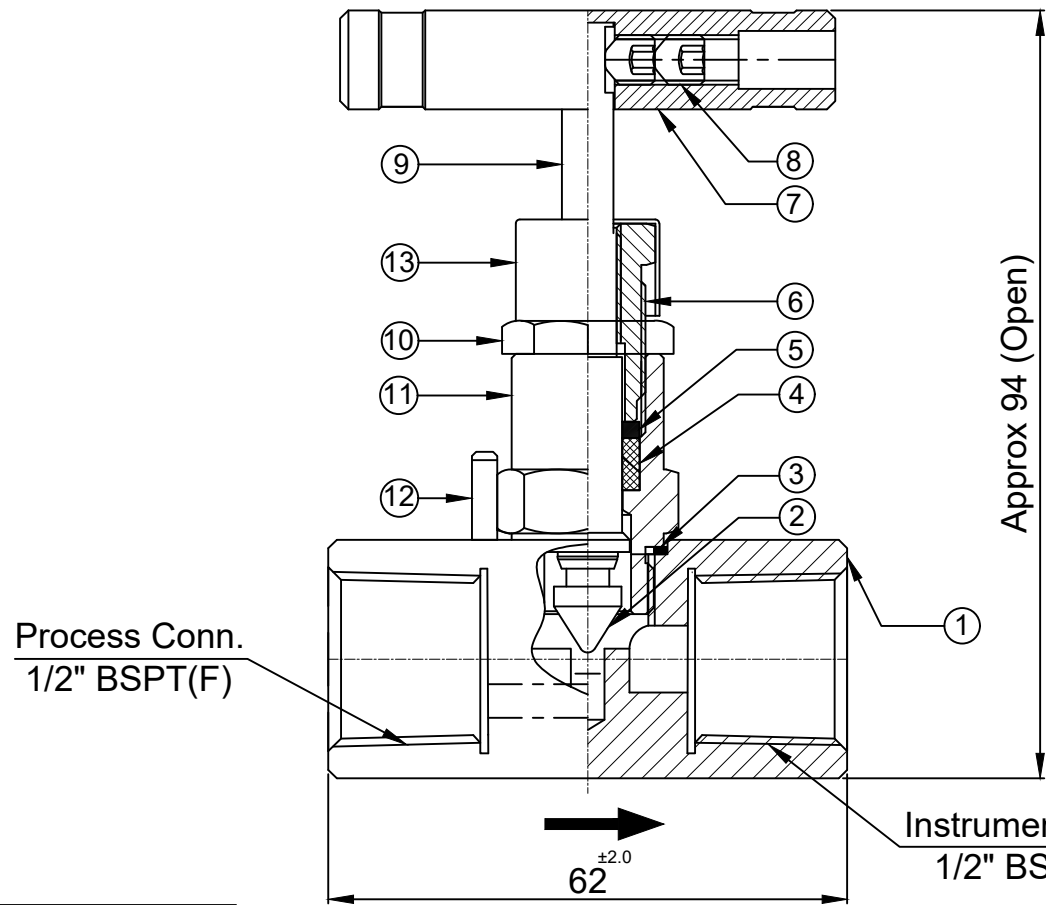

Data Sheet.
 Process Conn.: 1/2" BSPT(F)
 Instrument Conn.: 1/2" BSPT(F)

Orifice.: 4mm

Screwed Bonnet Design

Temperature Range : -20°F To 800°F
 M W P.: 6000 psig @ 100 °F
 Seat Test Press (Hydro): 6600 psig
 Seat Test Press (Pneu): 90 psig
 Body Test Press (Hydro): 9000 psig

havi
 Fittings & Valves
 info@havi.in www.havi.in
 A-201, PRIME TRADE CENTER
 SATIVALI ROAD, VASAI (E),
 PALGHAR - 401208, MAHARASHTRA, INDIA

	SIGN	DATE
DRAWN BY	MC	30-06-2023
CHECKED BY	MT	30-06-2023
APPROVED BY	SRD	30-06-2023

PART NAME : BAR STOCK NEEDLE VALVE, 1/2"BSPT FEMALE X 1/2"BSPT FEMALE				CUSTOMER NAME :							
DWG NO : - NVBS-8ITF-8ITF-A105-G				PROJECT NAME :							
MATERIAL : - AS PER BOM				ENQ NO : - 2300-000329							
REV NO				DESCRIPTION		SIGN		DATE		SO NO :-	
* All dimensions are in mm. Dimensions for reference only and are subject to change without notice				* This document is the property of Havi Engineering India Pvt. Ltd. No exploitation or release of any text contained herein or relating to this document is permitted in any form without the written consent of HAVI.							
										SHEET NO: 01 OF 01	
										REV NO: 00	
										SCALE: NTS	

PATH: C:\USERS\DESIGN\2\DESKTOP\ENQUIRY\2300-000329